


MAXIMUS

Completion Systems

CAST IRON PRODUCTS

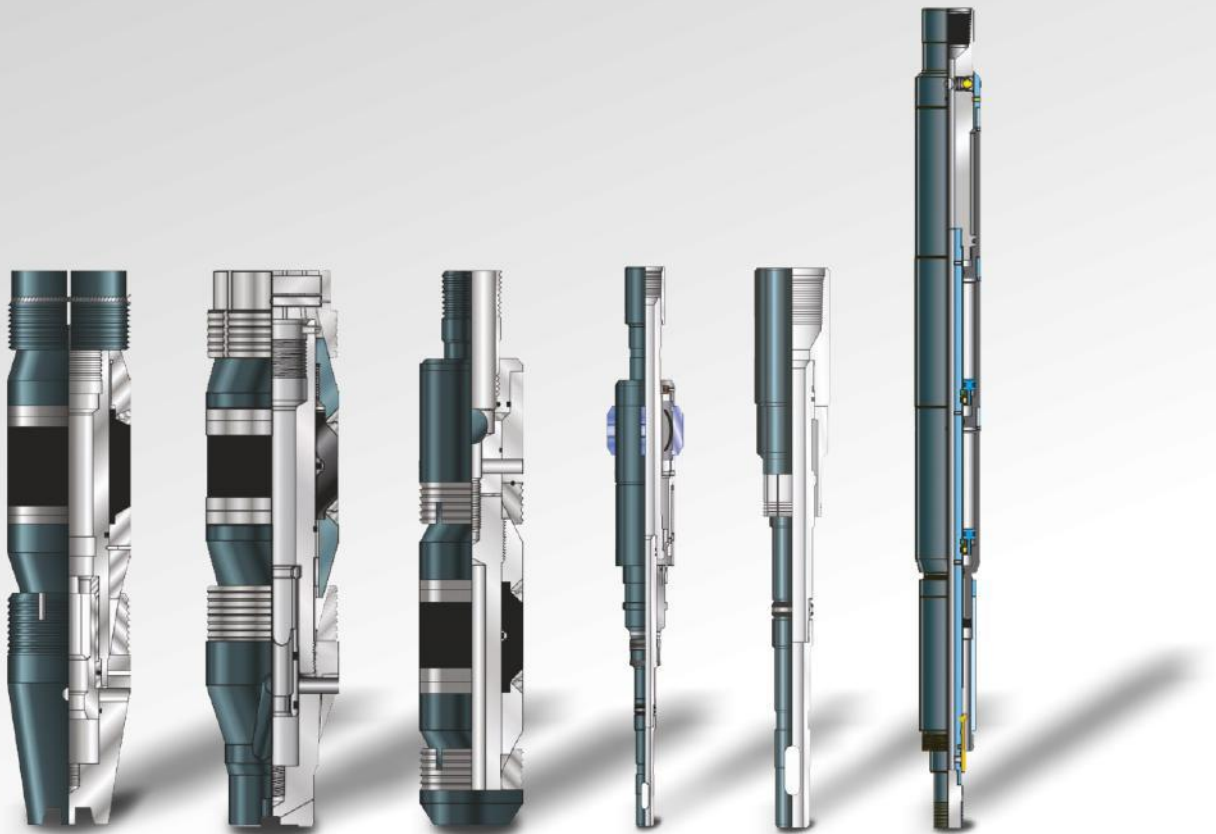

MAXIMUS

Completion Systems

Technical Information Wireline Set Slim Bridge Plug Cobra Slim Cap



JAS-ANZ



11457051010
01543 1001 1007

www.maximuscompletions.com

Cobra Slim Cap Wireline Set Slim Bridge Plug

The Magnus Cobra Slim Cap Bridge Plug is designed to have excellent running characteristics and securely sets in any grade casing/tubing including P-110.

Magnus Cobra Slim Cap Bridge Plug could be set using various available wireline pressure setting tools.

The grey cast iron construction allows rapid drill-out while maintaining sufficient strength when set.

The Cobra Slim Cap Bridge Plug is rated to 10,000 Psi., suitable upto 350°F temperature rating.

Assorted elastomers i.e. Viton, Aflas are also available for high temperature applications.

Applications

- Drillable cast iron construction
- Ideal for High-pressure environments
- Electric, Wireline Set
- One piece slip break apart evenly during setting
- Small OD's for extra clearance in heavy viscous fluids





Cobra Slim Cap
Wireline Set Slim Bridge Plug

Technical Specifications

Casing				Cobra Slim Cap Bridge Plug		
Size (in.)	Weight (PPF)	Min. I.D.	Max. I.D.	Pressure Rating (Psi)	Plug O.D.	Setting Force
2-3/8	4.00 to 5.80	1.780	2.074	10,000	1.750	9,000 (lbf/N)
2-7/8	6.40 to 6.50	2.340	2.525	10,000	2.220	9,000 (lbf/N)
3-1/2	5.75 to 10.30	2.867	3.258	10,000	2.750	9,000 (lbf/N)
4	5.60 to 14.00	3.340	3.732	10,000	3.140	20,000 (lbf/N)